


# MultiTransmitter User Manual

Updated April 13, 2021

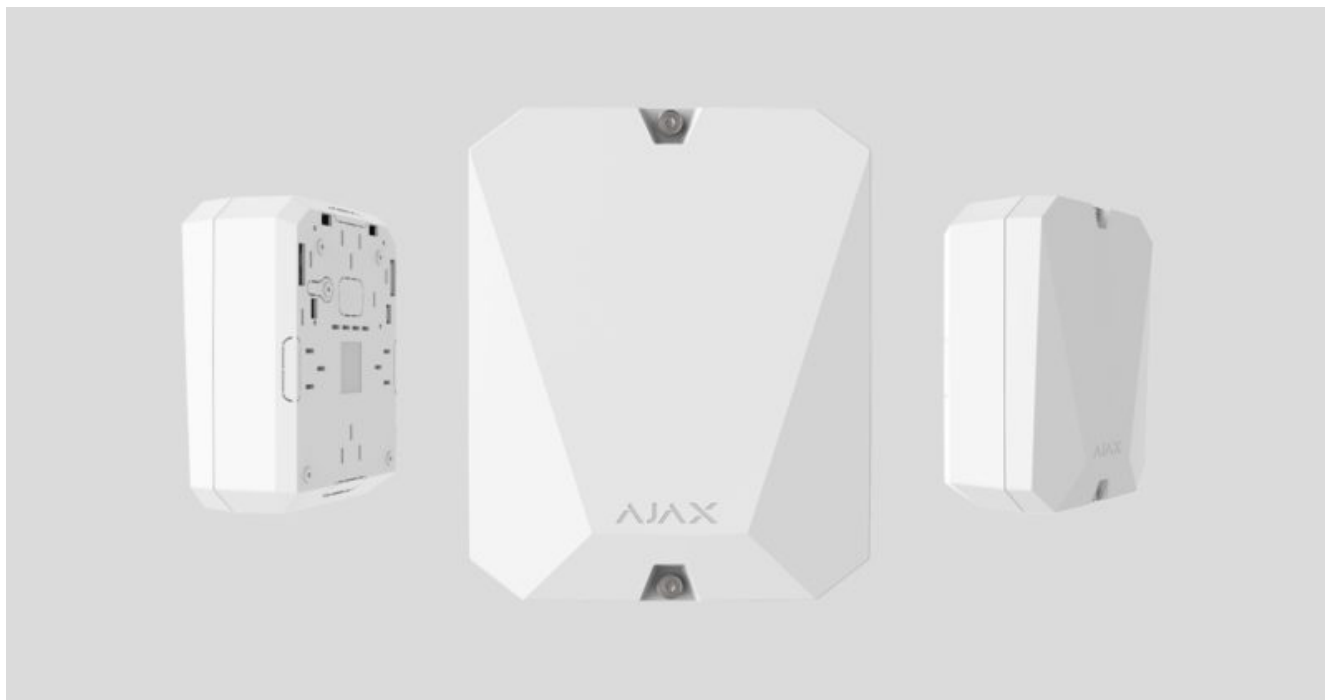

**MultiTransmitter** is an integration module with 18 wired zones for connecting third-party detectors to the Ajax security system. To protect against dismantling, MultiTransmitter is equipped with two tamperers. It is powered from the mains 100–240 V AC, and can also run on a 12 V backup battery. It can supply 12 V power to connected detectors.

MultiTransmitter operates as part of the Ajax security system by connecting via the Jeweller secure radio communication protocol to the hub. The hub communication range is up to 2,000 meters provided there are no obstacles. If jamming or interference is detected, the **“high level of interference at Jeweller frequencies”** event is transmitted to the central monitoring station of the security company and system users.


What jamming of a security system is

The device connects to the hub and is configured through [Ajax apps](#) on iOS, Android, macOS, and Windows. All alarms and user events are reported by push notifications, SMS, and calls if enabled. Ajax security system can be connected to the central monitoring station of the security company. The list of authorized partners is available [here](#).

## [Buy MultiTransmitter integration module](#)

## Functional elements

### Body elements

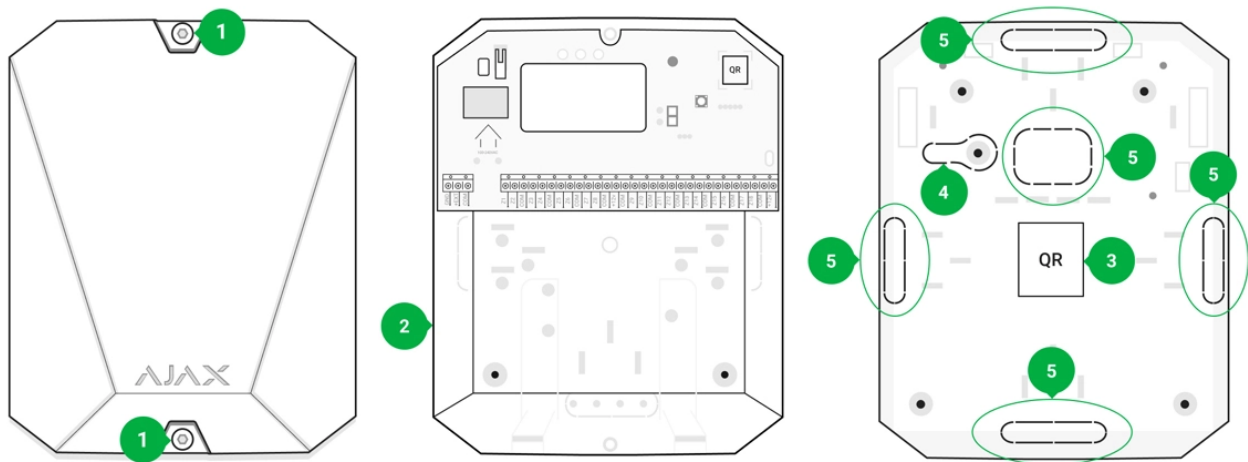

1. Screws securing the body lid. Unscrew with bundled hexagon key ( $\varnothing$  4 mm)
2. Cavity for backup battery




Battery not included with MultiTransmitter set

3. QR code and ID/serial number of the device

dismounting attempts


5. Perforated part of the body for the output of wires of connected detectors and devices

## MultiTransmitter card elements

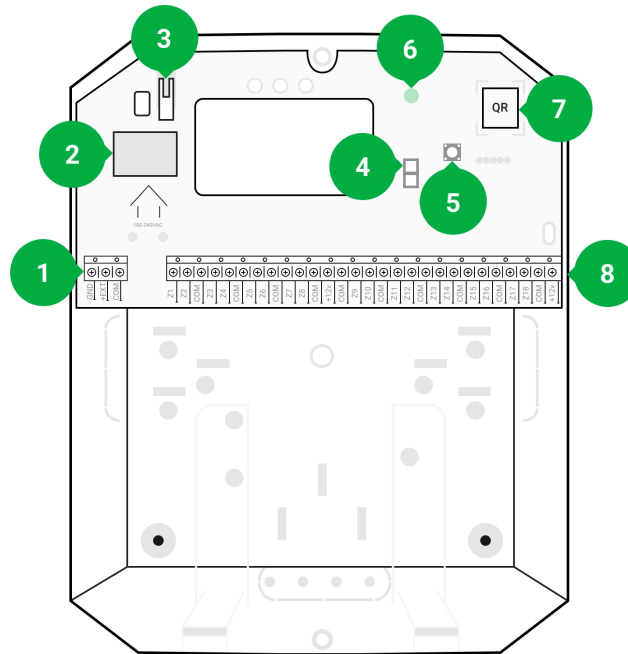

1. Power supply terminals for fire detectors
2. Power supply input 110/230 V
3. Tamper button. Signals if MultiTransmitter body lid is removed
4. Terminals for connecting a 12 V backup battery
5. Power button
6. LED indicator
7. QR code and ID/serial number of the device
8. Terminals for connecting wired detectors (zones)

## MultiTransmitter terminals

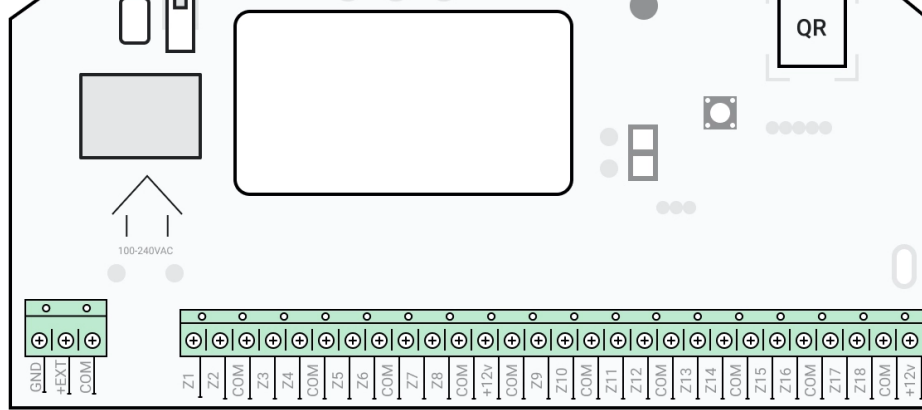

### Left-hand terminals:

**GND** – MultiTransmitter common ground

**+EXT** – 12 V power supply output for fire detectors

**COM** – common input for connecting power supply circuits and signal contacts of wired detectors


### Right-hand terminals:

**Z1–Z18** – input for wired detector connection

**+12 V** – 12 V power supply output for wired detectors

**COM** – common input for connecting power supply circuits and signal contacts of wired detectors

### LED indication

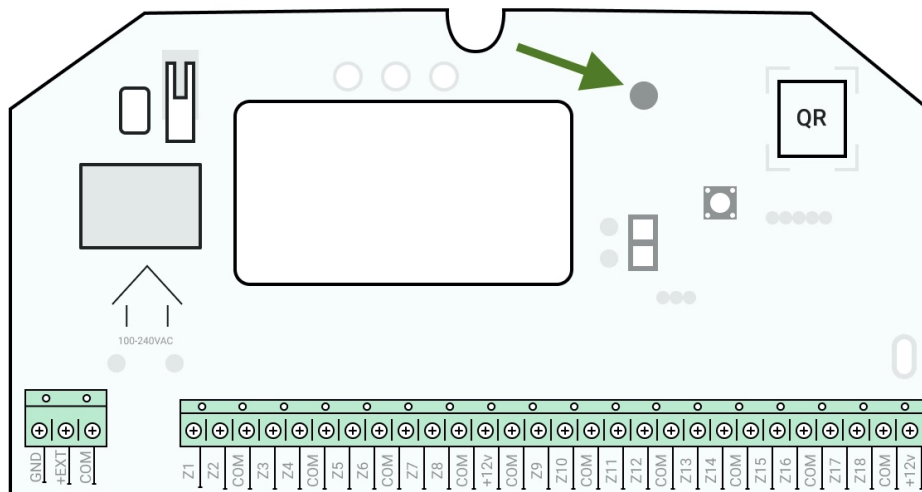


LED indication	Event	Note
Lights white	Connection with the hub is established, external power supply is connected	
Lights red	There is no connection with the hub, external power supply is connected	For example, the hub is turned off or MultiTransmitter is outside the coverage area of the hub's wireless network
Goes out for 0.5 seconds, then lights up green and turns off	Switching off the MultiTransmitter	
Blinks red once per second	MultiTransmitter is not assigned to the hub	
Lights up for a second once every 10 seconds	No external power supply is connected to MultiTransmitter	Lights up white if there is connection with hub. Lights up red if there is no hub connection
During an alarm, gradually lights up and goes out once every 10 seconds	No external power supply and discharged external battery of MultiTransmitter	Lights up white if there is connection with hub. Lights up red if there is no hub connection



If MultiTransmitter is not assigned to the hub or has lost connection with it, the integration module will not give an indication of the battery status or the presence of external power supply.



## Operating principle

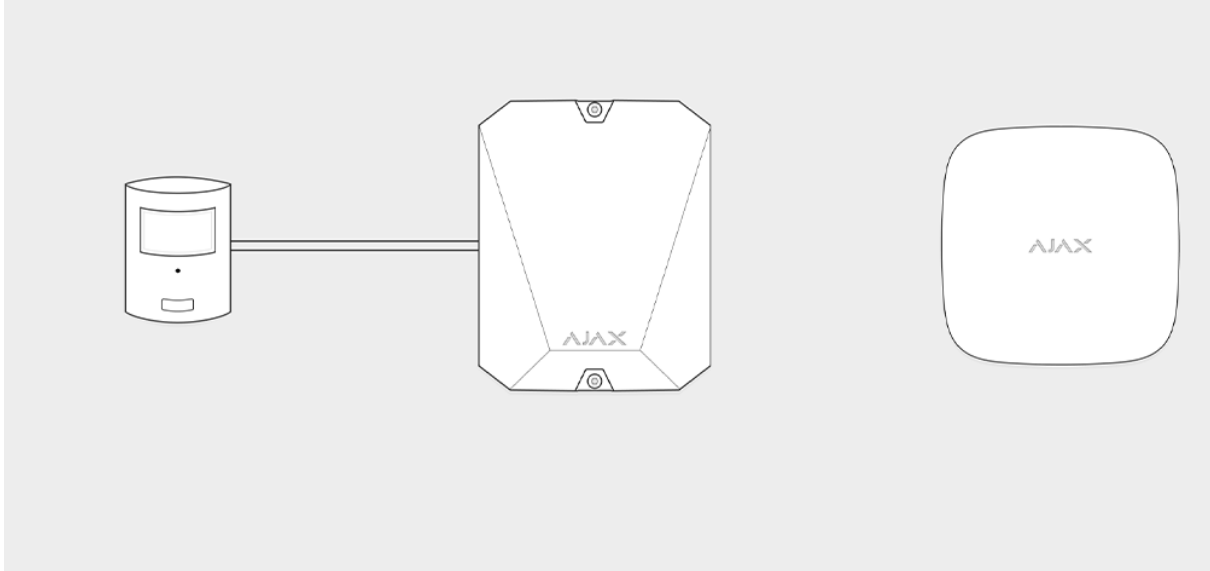


MultiTransmitter is designed for connecting third-party wired detectors and devices to the Ajax security system. The integration module receives information about alarms and triggering of detector tampers via wires connected to the terminals.



MultiTransmitter can be used to connect panic and medical alarm buttons, indoor and outdoor motion detectors, as well as detectors tracking opening, vibration, breaking, fire, gas, leakage, etc. The type of device is indicated in the zone settings. The text of notifications about alarms and events of the connected device, as well as event codes transmitted to the Central Monitoring Station (CMS) of the security company depend on the selected device type.

**A total of 6 types of devices are available:**

Type	Icon
Tamper	
Intrusion alarm	

Medical alarm	
Panic button	
Gas concentration alarm	

MultiTransmitter has 18 wired zones. The number of connected devices depends on their power consumption. The total maximum current consumption of all connected devices or detectors is 1 A.

**Supported connection types:**

Designation	Type
NO	Normally open
NC	Normally closed. Without resistors

The integration module has 3 power supply lines of 12 V: one dedicated line for fire detectors and two – for other devices.



After the fire alarm, fire detectors need a power reset to restore normal operation. Therefore, the fire detectors power supply should only be connected to a dedicated line. Also, avoid connecting other detectors and devices to power terminals of fire detectors as this may lead to false alarms or incorrect operation of the devices.

## Event transmission to the monitoring station

Ajax security system can connect to the CMS and transmit alarms to the monitoring station in Sur-Gard (ContactID) and SIA protocol formats.

The loop (zone) number of the integration module and the devices connected to it can be found in Ajax apps, in the **Groups** menu of the hub settings.

To learn the loop (zone) number, select the group in which the integration module is located or the desired connected device. The **Device Number** (or **DeviceIndex** in [Ajax PRO Desktop](#)) corresponds to the loop (zone) number.

## Connecting to the hub

For the Ajax security system, MultiTransmitter acts as a single device and each connected device or detector occupies a single slot in the limited number of the hub devices – 100 in [Hub](#) and [Hub 2](#), 150 in [Hub Plus](#), and 200 in [Hub 2 Plus](#).



Wired detectors can be connected to MultiTransmitter both before and after connecting the module to the hub.




2. Check that the hub is on and has access to the internet (via Ethernet cable, Wi-Fi, and/or mobile network). You can do this in the Ajax app or by looking at the hub logo on the front panel. The logo should light up white or green if the hub is connected to the network.
3. Ensure that the hub **is disarmed** and **does not start updates** by checking its status in the app.



Only users with administrator rights can add MultiTransmitter to the hub.

## In order to connect MultiTransmitter

1. Go to the **Devices** tab  in the Ajax app and click **Add Device**.
2. Name the integration module, scan or enter the QR code manually (located on the body and packaging), and select the placement room.
3. Click **Add**; the countdown will begin.
4. Turn on MultiTransmitter by holding the power button for 3 seconds. Keep in mind that the request to connect to the hub is transmitted only when the integration module is turning on.









For the detection and pairing to occur, the integration module should be located within the coverage area of the hub's wireless network (at the same guarded object).

If the connection has failed, disconnect MultiTransmitter for 5 seconds and try again.

# MultiTransmitter states


## Icons

Icons display some of the MultiTransmitter states. You can view them in the Ajax app, in the **Devices** tab .

Icon	Value
	Jeweller signal strength – displays the signal strength between the hub and MultiTransmitter
	A fire detector connected to MultiTransmitter has registered an alarm
	MultiTransmitter battery charge level
	MultiTransmitter has a malfunction. The list is available in the integration module states
	MultiTransmitter works through a ReX radio signal range extender

## States

States can be found in the [Ajax app](#):

1. Go to the **Devices** tab .
2. Select MultiTransmitter from the list.



Parameter	Value

Connection	Connection status between the hub and MultiTransmitter
Battery Charge	<p>Battery level of the device. Displayed as a percentage</p> <p><b><u>How battery charge is displayed in Ajax apps</u></b></p>
Lid	<p>The status of tampers that respond to detachment or violation of the integrity of the body</p> <p><b><u>What is a tamper</u></b></p>
External Power	The presence of external power supply 110/230 V
ReX "range extender name"	<p>The ReX range extender connection status.</p> <p>Displayed if MultiTransmitter is working via a <b><u>ReX radio signal range extender</u></b></p>
Detector power line	<p>Status of detector power terminals:</p> <ul style="list-style-type: none"> <li>● <b>OK</b> – terminals in normal condition</li> <li>● <b>Shorted</b> – terminals are shorted</li> </ul>
Fire detector power line	<p>Status of power supply terminals of fire detectors:</p> <ul style="list-style-type: none"> <li>● <b>OK</b> – terminals in normal condition</li> <li>● <b>Shorted</b> – terminals are shorted</li> </ul>
	Shows the status of the device temporary

Temporary Deactivation	alarms or other events. <ul style="list-style-type: none"> <li>● <b>By number of alarms</b> – the device is automatically disabled by the system when the number of alarms is exceeded (specified in the settings for Devices Auto Deactivation). The feature is configured in the Ajax PRO app.</li> <li>● <b>By timer</b> – the device is automatically disabled by the system when the recovery timer expires (specified in the settings for Devices Auto Deactivation). The feature is configured in the Ajax PRO app.</li> </ul>
Firmware	MultiTransmitter firmware version. It is not possible to change the firmware
ID	ID/serial number of MultiTransmitter. Also located on the device box and on the integration module body

## MultiTransmitter settings

Settings can be changed in the [Ajax app](#):

1. Go to the **Devices** tab .
2. Select MultiTransmitter from the list.
3. Go to **Settings** by clicking on the  icon.




Note that after changing the settings, you should click the **Back** button to save them.


Room	Selecting the virtual room to which MultiTransmitter is assigned. The room name is displayed in the text of SMS and notifications in the event feed
Alert with a siren, if power supply for detectors is shorted out	When enabled, sirens connected to the security system signal if detectors power line is shorted out
Jeweller Signal Strength Test	Switches the integration module to the Jeweller signal strength test mode. The test allows you to check the signal strength between the hub and MultiTransmitter and determine the optimal installation location  <b><u>What is Jeweller Signal Strength Test</u></b>
Attenuation Test	Switches MultiTransmitter to the signal attenuation test mode  <b><u>What is signal attenuation test</u></b>
	Allows the user to disconnect the device without removing it from the system.  Two options are available: <ul style="list-style-type: none"><li>● <b>Deactivate entirely</b> – the device will not execute system commands or participate in automation scenarios, and the system will ignore device alarms and other notifications</li><li>● <b>Deactivate lid notifications</b> – the system will ignore only notifications about the triggering of the device tamper button</li></ul>

	<a href="#">devices</a>
User Guide	Opens MultiTransmitter User Guide
Unpair device	Unpairs MultiTransmitter, disconnects it from the hub, and deletes its settings

## States of connected detectors and devices

You can find the states of connected wired detectors and devices in the [Ajax app](#):

1. Go to the **Devices** tab .
2. Select MultiTransmitter in the device list.
3. Click on **Devices**.
4. Select the device from the list.

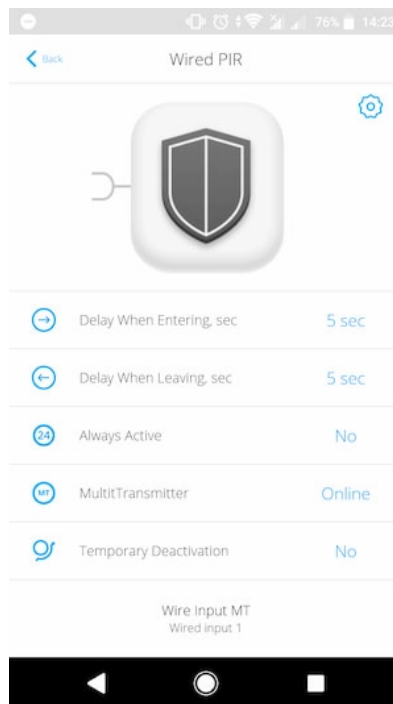


<p>Delay when entering, sec</p>	<p>entering (alarm activation delay) is the time you have to disarm the security system after entering the premises</p> <p><b><u>What is Delay When Entering</u></b></p>
<p>Delay when leaving, sec</p>	<p>Delay time when leaving in seconds. Delay when leaving (alarm activation delay) is the time you have to exit the premises after the security system is armed</p> <p><b><u>What is Delay When Leaving</u></b></p>
<p>Detector status</p>	<p>The status of the connected wired detector:</p> <ul style="list-style-type: none"> <li>● <b>OK</b> – the connected detector is normal</li> <li>● <b>Alarm</b> – the connected detector has detected an alarm</li> <li>● <b>Shorted</b> – the terminals to which the detector is connected are shorted. Status is only available in case of an EOL NC connection</li> <li>● <b>Break</b> – is displayed if the connected detector is disconnected. Status is only available in case of an EOL NO connection</li> </ul>
<p>Always active</p>	<p>When enabled, the detector is always in armed mode</p>
	<p>Status and name of the MultiTransmitter to which</p>



Temporary Deactivation	<ul style="list-style-type: none"> <li>● <b>Entirely</b> – the device is completely excluded from the system operation by the hub administrator. The device does not follow system commands and does not report alarms or other events.</li> <li>● <b>By number of alarms</b> – the device is automatically disabled by the system when the number of alarms is exceeded (specified in the settings for Devices Auto Deactivation). The feature is configured in the Ajax PRO app.</li> <li>● <b>By timer</b> – the device is automatically disabled by the system when the recovery timer expires (specified in the settings for Devices Auto Deactivation). The feature is configured in the Ajax PRO app.</li> </ul>
Device #	The number of MultiTransmitter zone to which the detector is connected

## Settings of connected wired detectors and devices

Settings can be changed in the [Ajax app](#):

1. Go to the **Devices** tab .
2. Select MultiTransmitter in the device list.



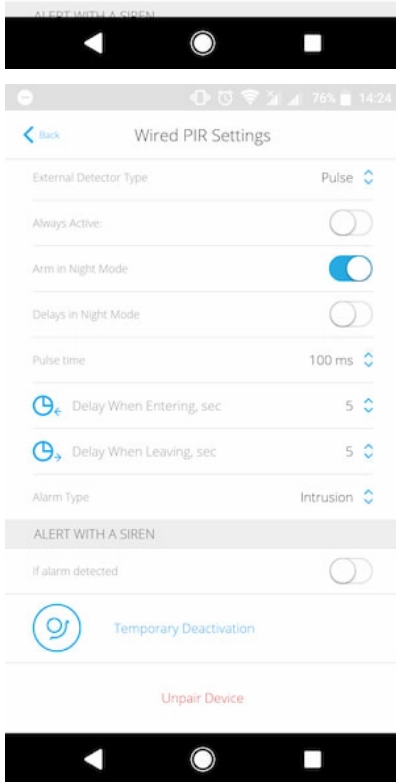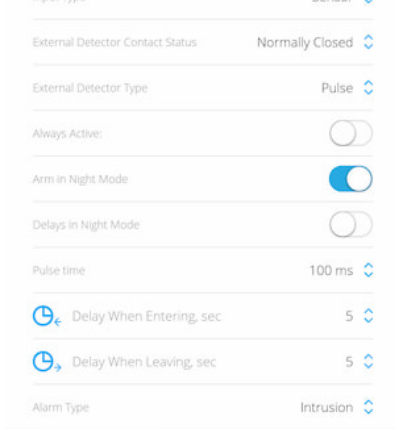

Setting	Value

<p>External Detector Contact Status</p>	<p>Selecting the normal contact state of the connected detector or device:</p> <ul style="list-style-type: none"> <li>● <b>NC</b></li> <li>● <b>NO</b></li> <li>● <b>EOL (NC with R)</b></li> <li>● <b>EOL (NO with R)</b></li> </ul>
<p>External detector type</p>	<p>Type of connected detector or device:</p> <ul style="list-style-type: none"> <li>● <b>Pulse</b> – e. g., a motion detector. After an alarm, a recovery event is not sent if the detector returns to the normal state</li> <li>● <b>Bistable</b> – e. g., an opening detector. After an alarm, a recovery event is also sent when the detector returns to the normal state</li> </ul> <p>Set the type that matches the connected detector. The pulsed detector in the bistable mode generates unnecessary recovery events. A bistable detector in pulsed mode, on the contrary, will not send recovery events</p>

<p>Delay when leaving, sec</p>	<p>leaving (alarm activation delay) is the time you have to exit the premises after the security system is armed.</p> <p>You can set a value from 0 to 120 seconds</p> <p><b><u>What is Delay When Leaving</u></b></p>
<p>Arm in Night mode</p>	<p>If active, the device will switch to armed mode when using night mode</p> <p><b><u>What is Night Mode</u></b></p>
<p>Delays in Night mode</p>	<p>Delay turned on when using night mode</p>
<p>Pulse time</p>	<p>Pulse time of a detector or device for detecting an alarm:</p> <ul style="list-style-type: none"> <li>● 20 ms</li> <li>● 100 ms</li> <li>● 1 s</li> </ul> <p>An alarm is raised if the pulse from the detector is longer than the specified value in this setting. It can be used as a bounce filter</p>

	feed depends on the selected type of alarm
Alert with a siren if alarm is detected	When enabled, <a href="#">sirens</a> connected to the security system signal about the alarm of the detector or device
Temporary Deactivation	<p>Allows the user to disconnect the device without removing it from the system.</p> <p>Two options are available:</p> <ul style="list-style-type: none"><li>● <b>Deactivate entirely</b> – the device will not execute system commands or participate in automation scenarios, and the system will ignore device alarms and other notifications</li><li>● <b>Deactivate lid notifications</b> – the system will ignore only notifications about the triggering of the device tamper button</li></ul> <p><b><a href="#">Learn more about temporary deactivation of devices</a></b></p> <p><b>Note that the system will ignore only the disabled device. Devices connected via MultiTransmitter will continue operating normally</b></p>



1. Select the MultiTransmitter zone to which you would like to connect a detector or device.
2. Route the wires of the detector or device into the integration module body.
3. Connect a wired detector or device to the appropriate MultiTransmitter terminals. The wiring diagram can be found in the User Guide provided by the manufacturer of the wired detector or device.
4. Securely fasten the cable to the terminals.

### How to connect a wired detector or device to MultiTransmitter



If the detector or device requires 12 V power supply for operation, it can be connected to the power terminals of the corresponding MultiTransmitter zone. Separate terminals are provided for fire detectors. Do not connect the external power supply to the detector power terminals, as this may damage the device.

Integration module functionality tests do not begin immediately, but not later than over a single ping period of the hub detector (36 seconds with the standard settings of the hub). You can change the ping period of devices in the **Jeweller** menu of the hub settings.

Tests are available in the device settings menu (**Ajax app** → **Devices**  → **MultiTransmitter** → **Settings** 

- [Jeweller Signal Strength Test](#)
- [Attenuation Test](#)

## Selecting MultiTransmitter placement

The placement of the integration module determines its distance from the hub and the presence of obstacles between them that impede the passage of the radio signal: walls, inter-floor constructions, or large-sized objects located in the room.



Be sure to check the signal strength at the installation site. If the signal strength is low (a single bar), we cannot guarantee a stable operation of the security system! At the very least,

The body allows mounting the integration module on a vertical surface.

**In order to install a module:**

1. Secure the body to the surface with bundled screws using at least two fixing points. In order for the integration module tamper to respond to a dismantling attempt, be sure to fix the body at the point with the perforated section.
2. Install the MultiTransmitter card into the body on the racks.
3. If available, connect a backup battery. Don't connect external power supply!



We recommend using a 12 V battery with a capacity of 4 or 7 A·h. For such batteries, special racks in the body are designed. You can also use similar batteries of a different capacity, of matching size, with the maximum full charge time of no more than 30 hours. The maximum battery size for installation in the body is 150 × 64 × 94 mm.

# Maintenance

Check the functionality of the integration module regularly. Clean the body from dust, cobwebs, and other contaminants as they emerge. Use a soft dry cloth that is suitable for equipment care. Do not use any substances containing alcohol, acetone, gasoline, and other active solvents to clean the device.

## Malfunction notifications

MultiTransmitter can report malfunctions to the central monitoring station of the security company, as well as to users through push notifications and SMS.

Notification	Value	Action
Contact is shorted out, <b>[device name]</b> in <b>[room name]</b>	MultiTransmitter terminals for connecting the wired device are shorted.  Notification can only be	Check the connection of the wired device or detector for short circuit.  After the normal state of the



<p>Fire detector power supply terminal is shorted out, <b>[device name]</b> in <b>[room name]</b></p>	<p>MultiTransmitter fire detector power supply output is shorted</p>	<p>Check the power supply connection of the wired fire detector for short circuit.</p> <p>After the normal state of the terminals is resumed, you will receive respective notification</p>
<p>Battery is charging too long</p> <p><i>Displayed in integration module statuses</i></p>	<p>MultiTransmitter battery charges for over 40 hours</p>	<p>The battery is most likely defective. Install another backup battery</p>

## Fire alarms reset

In case of alarms of the fire detectors connected to MultiTransmitter, the window prompting of the need to reset the alarms is displayed in the Ajax app. This will make the detectors return to their normal state and continue to respond to a fire.



## 6. Quick Start Guide

### Warranty

The warranty for the “AJAX SYSTEMS MANUFACTURING” Limited Liability Company products is valid for 2 years after the purchase.

If the device does not work correctly, you should first contact the support service. In half of the cases, technical issues can be solved remotely!

Warranty obligations

User agreement

